

EPSON[®]
EXCEED YOUR VISION



Epson EB-470, 475W, 480 and 485W ULTRA-SHORT-THROW PROJECTORS



Ultra-short-throw projectors with comprehensive connectivity and premium audio.

The Epson EB-470/475W/480/485W ultra-short-throw projectors make it easy to project large, vibrant images from the shortest distance for maximum impact and flexibility. They can be mounted to the wall with the included wall mount, making them ideal for use with interactive or standard dry-erase whiteboards. Project a brilliant 80" image on a wall or screen from approximately 20cm away from the edge of the projector. The 475W and 485W boast a 16:10 widescreen (WXGA) aspect ratio for displaying high-definition content, and content from widescreen computers, while the 470 and 480 boast a 4:3 (XGA) aspect ratio. Featuring future-ready HDMI connectivity, all four projectors are ideal for classrooms equipped with the latest devices.

Ultra-short throw distance — ideal for wall-mount installations and use with interactive or standard dry-erase whiteboards; significantly reduces shadow interference and glare

Larger-than-life standard and widescreen images — XGA resolution (470, 480), WXGA resolution (475W, 485W)

Future-ready connectivity — HDMI digital connectivity for classrooms with the latest devices



EB-470/475W/480/485W ULTRA-SHORT-THROW PROJECTORS

The best-selling projectors in the world

Epson understands education and has a solution no matter what your teaching scenario. Built with image quality and reliability in mind, EPSON® projectors enhance communication and inspire collaboration, while offering a low cost of ownership. From long-throw projectors designed for traditional educational settings to ultra-short-throw and all-in-one solutions built for progressive classrooms, Epson has the model made for you.




Leading-edge technology and performance

Spectacular quality and colour with 3LCD technology

Innovative technology with proven reliability


- 3 chips for full-time, vibrant colour
- 25% less electricity required per lumen of brightness when compared to 1-chip DLP projectors¹
- Over 20 years of road-tested reliability built into every projector

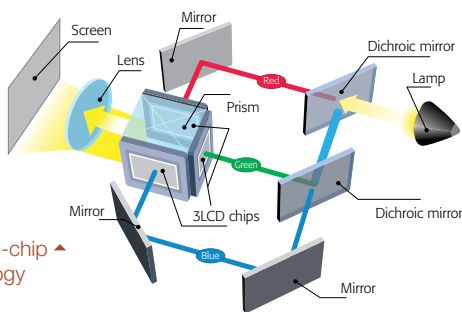

3LCD, 3-chip technology

Amazing colour and white light output

Whether you're projecting images with deep, dark colours or a white screen with minimal text or graphics, you get rich, colourful images with:

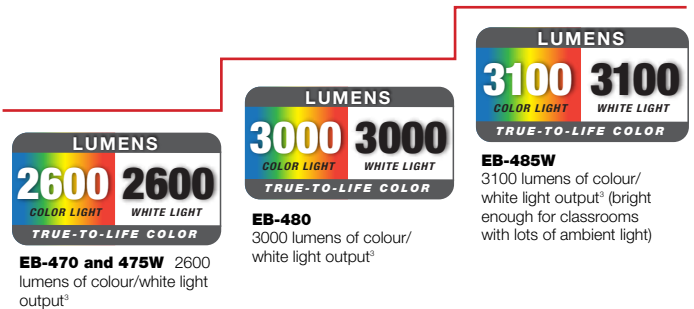

Ultra-short-throw projection

A leader in ultra-short-throw projection, Epson designed these projectors to ensure the following benefits:


- Large images to engage any audience — project an 80" image from approximately 20cm away
- Minimal shadow interference — no need to worry about obscuring the screen with shadows cast by the presenter
- Minimal glare — unlike traditional front-projection technology, these projectors make it more comfortable for presenters since they do not have to deal with light shining in their eyes
- Wall mount installation makes these projectors ideal for use with interactive or standard dry-erase whiteboards

Long-life lamp

- High-efficiency lamp life provides a low total cost of ownership — up to 3000 hours in Normal Mode and up to 4000 hours in ECO Mode²
- Easy replacement — top-loading lamp means you don't have to uninstall the projector from the wall mount

Brilliant widescreen performance (EB-475W/485W only)

- High-definition WXGA (1280 x 800) resolution and a 16:10 aspect ratio allow you to project HD widescreen content as well as content from widescreen notebooks
- Get amazing images and 30% more image area than with a standard 4:3 projector, plus the capability to display 4:3 and 16:9 content, without sacrificing image quality



Long throw distance

Ultra-short throw distance



Significant reduction in shadow interference and glare

Advanced connectivity including network features

HDMI for high-definition video and audio

- Delivers both audio and brilliant HD video content with just one cable
- Future-ready connectivity ensures compatibility with the latest laptop, Blu-ray® and media playing devices

HDMI™



Present remotely via RJ-45 network connectivity

Transmit both audio and video with a single connection

- Display material from any networked location, or in up to 4 different classrooms simultaneously
- Present remotely to support distance learning applications
- Connect wirelessly, via a network access point or optional wireless module, to give teachers the freedom to move around the classroom and interact with students for a more engaging learning environment



Monitor/control projectors remotely

Easily monitor/control EPSON networked projectors remotely, using the RJ-45 connection and EasyMP® Monitor software

- Save time and maintenance costs — power classroom projectors on and off without having to go to each individual classroom; set schedules for automatic events
- Receive e-mail alerts when attention is required
- Crestron RoomView™ enabled — monitor/control your projector with RoomView software, without the need for an A/V control box
- Broadcast your message — advertise events or broadcast instructions to all networked EPSON projectors⁵



Virtual remote control on your computer


- Convenient projector remote control via a web browser (when projector is connected to the network)
- Control power on/off, source, volume, page up/down functions and more from your computer
- No special applications or software necessary; simply use your web browser in Windows® or Mac



Easy setup using 3-in-1 USB Plug 'n Play — for PC and Mac

Three features, all with one standard USB connection

- Display your presentation
- Transmit audio
- Control your presentation via remote control
- Eliminate the need for three separate cable connections

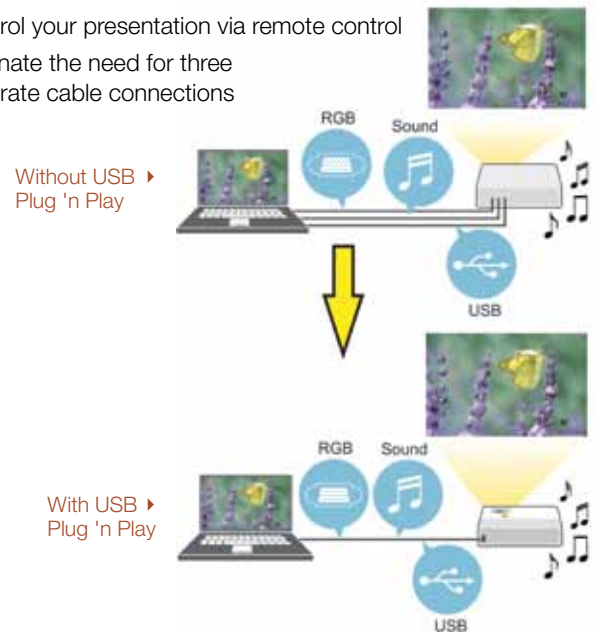


Convenient control and energy-saving features

- Instant Off® — no cool-down time required; it's ready to shut down when you are
- A/V Mute — pause your presentation to direct focus elsewhere or take a quick break
- Sleep Mode — set from 1 to 30 minutes to save energy when no signal is detected
- Direct Power On/Off — power the projector on/off with the flip of a wall switch

Easy setup with included wall mount


Versatile image projection

- Improved mount and short throw distance allows 90" WXGA image projection, even in rooms with ceilings as low as 2.4m — like portable classrooms

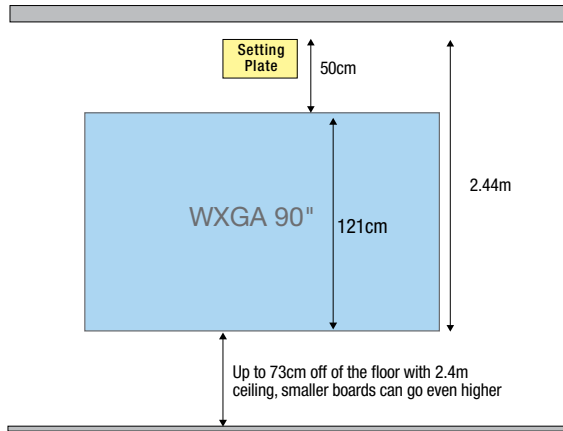

Easy picture adjustments

- 1.35x digital zoom — for positioning flexibility
- +/- 5 degrees vertical keystone correction — allows for easy adjustments when the projector is placed above or below the center of the projection screen
- +/- 5 degrees horizontal keystone correction — allows for off-center positioning, so you can still present a rectangular image

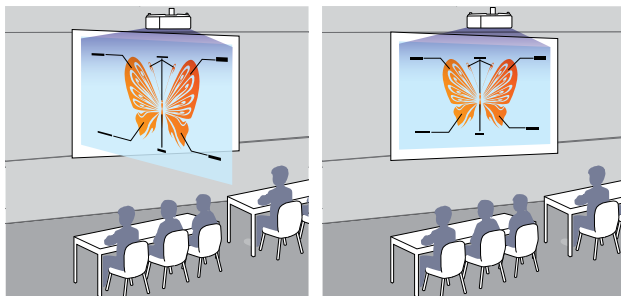


Without horizontal keystone

With horizontal keystone



New, improved wall mount included


- Flexible wall mount makes installation in a wide variety of classroom environments easy
- Includes adjustments for horizontal roll, horizontal rotation, vertical tilt, horizontal shift, distance extensions and vertical height adjustments for precise installations

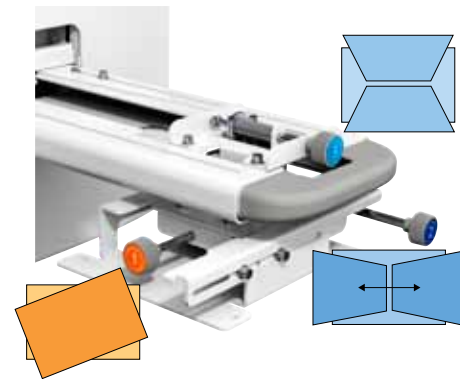

- Large, colour-coded dials provide intuitive guidance on adjustments

Quick Corner®

- This innovative feature allows you to move any of the four corners of an image independently, for a perfectly rectangular picture

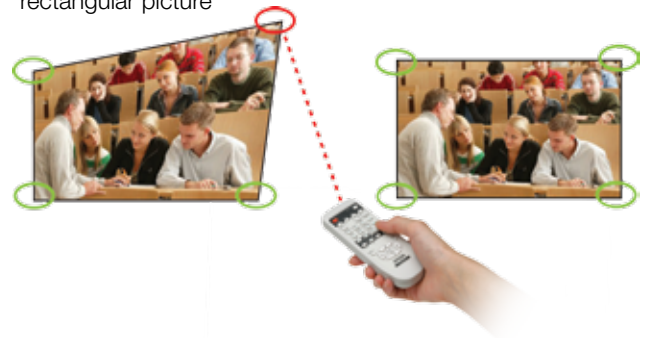

Better Products for a Better Future™

For more information on Epson's environmental programs, go to www.epson.com.au/company/environment



Eco Features


- Energy-efficient 3LCD light engine
- Recyclable product



Unique sound and communication tools


Built-in 16 W speaker and microphone input

- Captivate your entire classroom with 16 W of powerful sound using the internal speaker
- Convenient microphone input allows you to connect a microphone to the projector and amplify your voice through the projector's built-in speaker
- The microphone can even be used while the projector is in standby mode, which saves energy and costs
- Audio pass-through feature enables you to use the audio out port with external speakers, even when the projector is in standby mode, saving lamp life and energy



Built-in teaching aids save time


- Choose from four pre-set templates to project lines or grids onto whiteboards or chalkboards, or create a custom template such as a map or other image used frequently
- Simply display the template by selecting the customizable User button on the projector remote control

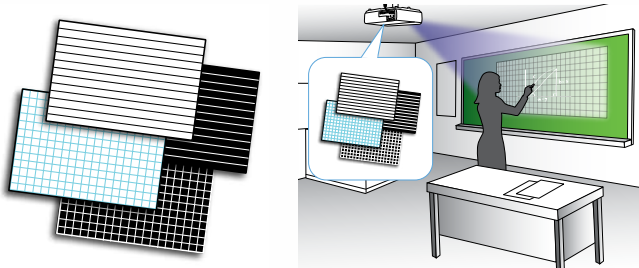





Easily project lines or grids with built-in templates

EB-470, 475W, 480 and 485W Additional Features


- **Versatile connectivity for the classroom** — HDMI, VGA inputs (computer/component), audio inputs, USB, audio out, monitor out, microphone input, RS-232c and RJ-45
- **Fast wireless 802.11 b/g/n connectivity** — with the optional wireless module via either:
 - Included software (Mac® and PC) or
 - Optional Quick Wireless Connection USB key for fast, ad hoc, wireless connectivity (PC only)
- **High efficiency filter** — 2x the surface area of previous filters for better protection against dust; cleaning schedule up to 5000 hours⁴



The EPSON ultra-short-throw projector series Model Comparison

GOOD	EB-470 Best value, brilliant images	2600 lumens XGA Resolution 1024 x 768	
	EB-475W Step up to widescreen resolution	2600 lumens WXGA Resolution 1280 x 800	
BETTER	EB-480 Step up to ultra-bright images	3000 lumens XGA Resolution 1024 x 768	
	EB-485W Step up to ultra-bright widescreen resolution	3100 lumens WXGA Resolution 1280 x 800	

EB-470, 475W, 480 and 485W Ultra-short-throw Projectors

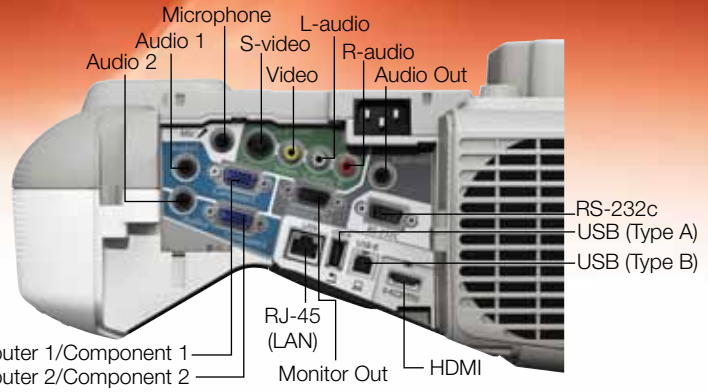

Computer 1/Component 1
Computer 2/Component 2

Product Name	Product Code
EB-470 Projector	V11H456053
EB-475W Projector	V11H455053
EB-480 Projector	V11H485053
EB-485W Projector	V11H454053

Specifications

Projection System

3LCD, 3-chip technology

Projection Method

Front/rear wall mount

Driving Method

Poly-silicon TFT Active Matrix

Pixel Number

470/475W: 786,432 dots (1024 x 768) x 3
475W/485W: 1,024,000 dots (1280 x 800) x 3

Colour Light Output³

470/475W: 2600 lumens
480: 3000 lumens
485W: 3100 lumens

White Light Output³

470/475W: 2600 lumens (ISO 21118 standard)
480: 3000 lumens (ISO 21118 standard)
485W: 3100 lumens (ISO 21118 standard)

Aspect Ratio

470/480: 4:3
475W/485W: 16:10

Native Resolution

470/480: 1024 x 768 (XGA)
475W/485W: 1280 x 800 (WXGA)

Resize

640 x 480 (VGA), 800 x 600 (SVGA),
1024 x 768 (XGA/475W and 485W only),
1152 x 864 (SXGA), 1280 x 800
(WXGA/470 and 480 only),
1280 x 960 (SXGA2), 1280 x 1024 (SXGA3),
1280 x 768 (WXGA 60-1/470 and 480 only),
1360 x 768 (WXGA 60-2), 1440 x 900 (WXGA+),
1400 x 1050 (SXGA+), 1600 x 900 (WXGA++)

Lamp Type

470/475W: 190 W UHE
480/485W: 215 W UHE

Lamp Life²

Up to 4000 hours (ECO Mode)
Up to 3000 hours (Normal Mode)

Throw Ratio Range

470/480: 0.31 – 0.42
475W/485W: 0.27 – 0.37

Size (projected distance)

470/480: (0.348 to 0.597 m)
475W/485W: (0.348 to 0.597 m)

Keystone Correction Manual

Vertical ± 5 degrees
Horizontal ± 5 degrees

Mac Connectivity

Projector is Mac compatible via USB,
DVI to HDMI or VGA adapter (not included),
DP to HDMI or VGA

Contrast Ratio

Up to 3000:1

Colour Reproduction

16.77 million colours

Projection Lens

Type

No optical zoom/Manual focus

F-number

1.80

Focal Length

3.71 mm

Zoom Ratio

Digital zoom 1.0 – 1.35

Other

Display Performance

NTSC: 560 lines
PAL: 560 lines
(Depends on observation of the multi-burst pattern)

Input Signal

NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/
SECAM

Interfaces

HDMI x 1
Computer/component video: D-sub 15 pin x 2
S-video: Mini DIN x 1
Composite video: RCA (Yellow) x 1
Audio in: RCA x 1 (L and R), Mini stereo x 2
USB connector: Type B x 1
(USB display, audio and mouse control)
USB connector: Type A x 1
(USB memory/document camera)
RJ-45 x 1
Serial: RS-232c x 1
Monitor out: D-sub 15 pin x 1
Audio out: Mini stereo x 1

Microphone: Mini stereo x 1

Wireless LAN port: 802.11 b/g/n
(optional – module sold separately)

Speaker

16 W (mono)

Operating Temperature

5° to 35 °C

Power Supply Voltage

100 – 240 V ± 10%, 50/60 Hz

Power Consumption

470/475W: 275 W (Normal Mode)
215 W (ECO Mode)
8.3 W Standby (Communication On)
0.27 W Standby (Communication Off)
480/485W: 300 W (Normal Mode)
215 W (ECO Mode)
8.3 W Standby (Communication On)
0.27 W Standby (Communication Off)

Other (continued)

Fan Noise

35 dB (Normal Mode)
28 dB (ECO Mode)

Security

Kensington®-style lock provision,
padlock and security cable hole,
password protect function

Dimensions (W x D x H)

Including feet: 367w x 181.5h x 375d mm
Excluding feet: 367w x 143h x 375d mm
Weight: 5.2kg

Remote Control

Features

Source search, video, LAN, computer, USB,
power, aspect, colour mode, volume, e-zoom,
A/V mute, freeze, menu, page up and down,
help, auto, mouse functions, user, esc

Operating Distance

Front/rear: 6 m

Support

What's In The Box

EB-470, 475W, 480 or 485W projector,
wall mount, 5m power cord, projector
remote control, batteries, user manual CD,
projector software CD, Quick Setup Sheet,
installation guide, template sheet,
password protection sticker

Accessory Part Numbers

Genuine EPSON lamp	V13H010L71
Replacement air filter	V13H134A40
Control Box (ELPCB01)	V12H443053
Active speakers (ELPSP02)	V12H467053
Wireless 802.11b/g/n LAN unit (ELPAP07)	V12H418P13
Quick wireless connection USB key (ELPAP08)	V12H005M08
EPSON DC-06 document camera (ELPDC06)	V12H321003
EPSON DC-11 document camera (ELPDC11)	V12H377053

1 Data source: ProjectorCentral.com Jan. 2011. Average of 1038 shipping models for which manufacturers provided lumens and total power data, all resolutions and brightness levels.

2 Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

3 Colour and white light output will vary depending on mode selected. White light output measured using ISO 21118 standard.

4 Recommendation based on normal room conditions. Cleaning requirements may vary depending on use, environment and other conditions. Cleaning intervals may be adjusted to accommodate the environment in which the projector is used.

5 Works only with EPSON projectors that support presentation over the network capability.

EPSON AUSTRALIA

3 Talavera Road
North Ryde NSW 2113
Tel: (02) 8899 3666
www.epson.com.au

EPSON NEW ZEALAND

Level 2, 7-9 Fanshawe Street
Auckland, 1010
Tel: (09) 366 6855
www.epson.co.nz

ABN 91 002 625 783

04/12